

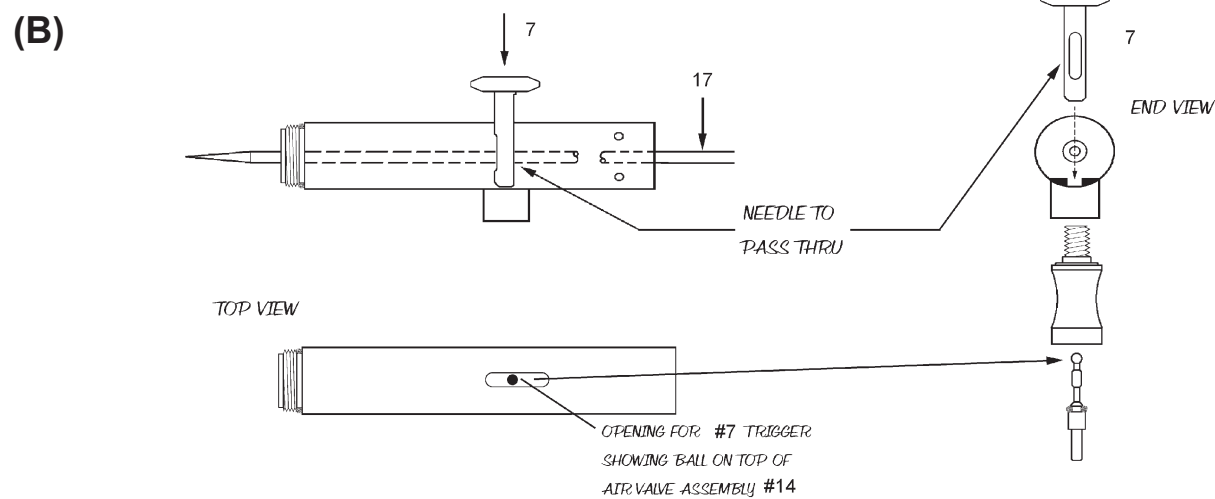


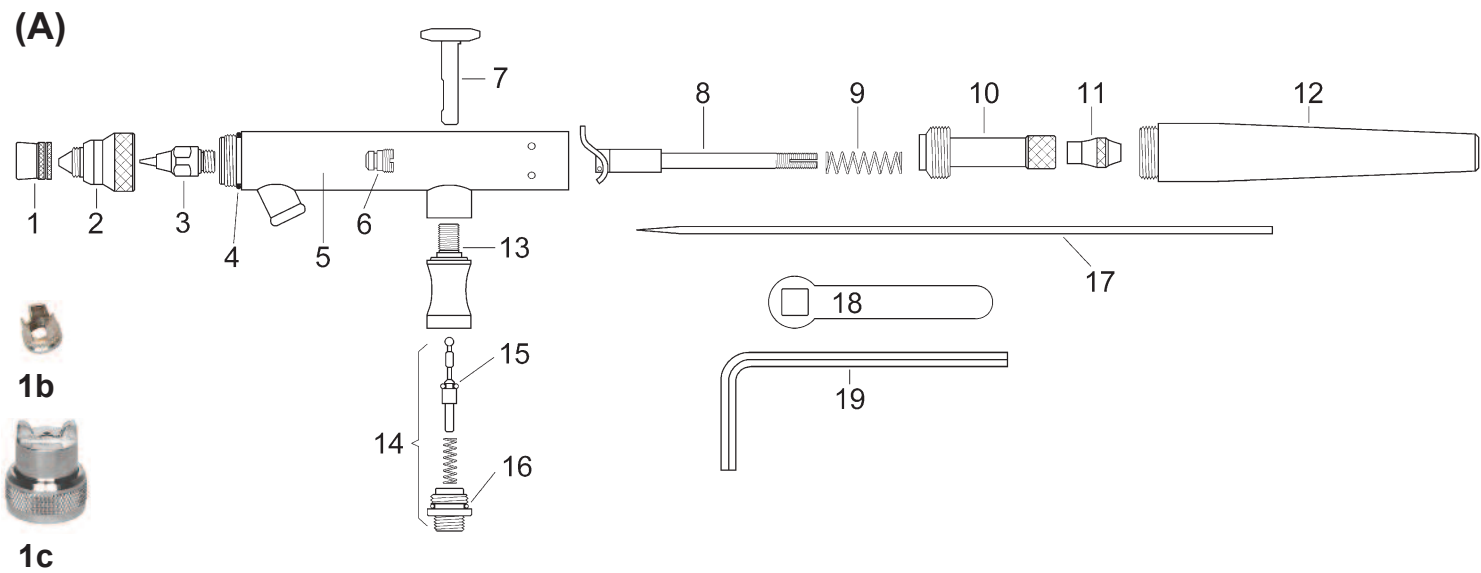

<u>NO.</u>	<u>PART</u>	<u>DESCRIPTION</u>	<u>NO.</u>	<u>PART</u>	<u>DESCRIPTION</u>
1.	XI-41	Needle Protection Cap	11.	TAL-19	Needle Lock Nut
1b.	TAL-23	Crown Cap (Optional)	12.	TS-33	Handle
1c.	TAF-3	Fan Aircap for .66mm Head- (uses TT-3 & TN-3)(Optional)	13.	TAL-14	Valve Casing
2.	TA-2, TA-3	Aircap (.38mm, .66mm)	14.	TAL-32	Air Valve Assembly
3.	TT-2, TT-3	Tip (.38mm, .66mm)	15.	TAL-26	"O" Ring
4.	MIL-12	"O" Ring	16.	TAL-22	"O" Ring
5.	TS-30	Shell Assembly	17.	TN-2, TN-3	Needle (.38mm, .66mm)
6.	TAL-8	Packing Assembly PTFE	18.	TAL-28	Wrench
7.	TAL-37	Trigger	19.	TAL-35	Allen Wrench
8.	TAL-18	Rocker Assembly			
9.	MIL-11	Needle Spring			
10.	TAL-17	Spring Housing			

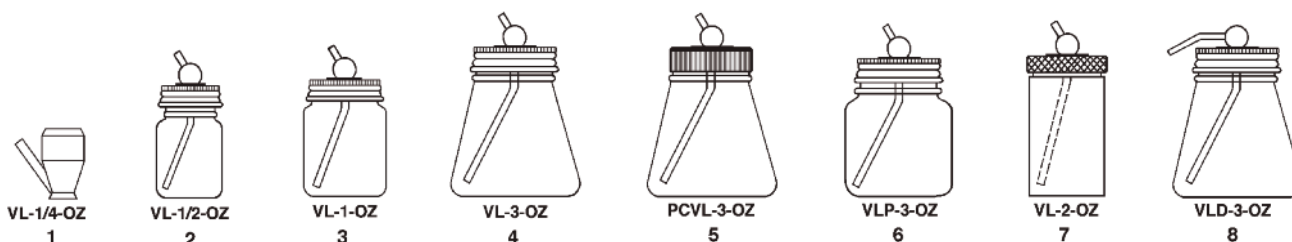

NO.	PART NO.	DESCRIPTION		
1.	VL-1/4-OZ	Metal Color Cup (7cc)		
2.	VL-1/2-OZ	Color Bottle Assembly (14.5cc)		
	VL1/2	1/2 oz. Cover Assembly		
	VF-17	Color Tube		
3.	VL-1-OZ	Color Bottle Assembly (29cc)		
	VL1	1 oz. Cover Assembly		
	VF-17	Color Tube		
	5-G	Gasket		
4.	VL-3-OZ	Color Bottle Assembly (88cc)		
	VL3	3 oz. Cover Assembly		
	VF-14	Color Tube		
	3-JG	Gasket		
5.	PCVL-3-OZ	Nylon Cover/Metal Tube Bottle Assem. (88cc)		
			PCVL3	Nylon Cover Assembly
			VF-14M	Metal Color Tube
			3-JG	Gasket
			6. VLP-3-OZ	Plastic Bottle Assembly (88cc)
			VL3	3 oz. Cover Assembly
			VF-14	Color Tube
			3-JG	Gasket
			7. VL-2-OZ	Aluminum Cup Assembly (60cc)
			VF-2-5/8	Color Tube
			3-JG	Gasket
			8. VLD-3-OZ	Decorator Bottle Assembly (88cc)
			VLD3	3 oz. Cover Assembly
			VF-14	Color Tube
			3-JG	Gasket

Recommended Compressors and Accessories



D220R AIR COMPRESSOR (1/6 H.P.), with Switch & R-75 Regulator
Economical and suitable for all airbrushes spraying properly thinned fluids. It is capable of delivering 30 - 45 P.S.I. operating pressure depending on airbrush being used. The Paasche D220R is an oilless diaphragm unit and comes with the R-75 Regulator/Filter with gauge. It operates on 110-120 Volt, 1 phase, 60Hz, and delivers .7 C.F.M. @ 20 P.S.I. R75 Regulator will regulate up to 45 P.S.I. depending on usage (intermittent or constant) and size of airbrush being used.
Shipping Weight: 11 lbs. (5kg)



D500 AIR COMPRESSOR (1/8 H.P.) (ETL Listed)


Economical and suitable for all airbrushes spraying properly thinned fluids. It is capable of delivering up to 35 P.S.I. operating pressure depending on airbrush being used. The Paasche D500 is an oilless piston compressor. It operates on 110-120 Volt, 1 phase, 60Hz, and delivers .4 C.F.M. @ 20 P.S.I.
Shipping Weight: 8 lbs. (3.6kg)

ACCESSORIES




AL-2, 2.4 fl.oz., (85ml)
PAASCHE AIRBRUSH LUBE

36 A-34 Hanger




AIRHOSES W/FACTORY INSTALLED COUPLINGS

- 34 A-1/8 Braided Airhose W/Couplings
35 HP-1/8 Red-Plastic Airhose W/Couplings

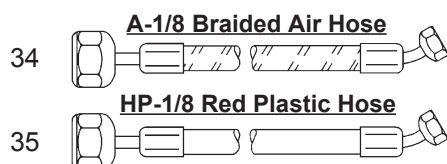

MT MOISTURE TRAP INSTALLATION

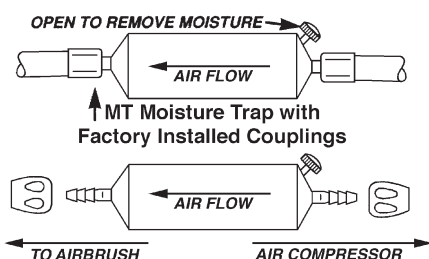

Do-It-Yourself Installation: The Moisture Trap is designed for use with all Airbrushes to remove water from the airline. To install-cut the airhose about 18" from the Airbrush coupling and insert as illustrated.



DA300R AIR COMPRESSOR (1/6 H.P.) with Switch CSA approved & R-75 Regulator
1/8 H.P. Piston Compressor with Auto shutoff. Compressor shuts off when airbrush is not in use. Operating pressure is 20 - 30 P.S.I. depending on airbrush being used, delivers up to 35 psi. 120 VAC, 1 Ph, 60 Hz, 1.4 A, 20L/Min. (0.7CFM), Noise 53dB, 1720 rpm.
Shipping Weight: 9.14 lbs. (4.6 kgs)



D3000R AIR COMPRESSOR (1/8 H.P.) (ETL Listed)

This piston compressor is a tank mounted unit, designed for compactness and portability. The sturdy air tank stores reserve air volume and reduces pulsation. Air pressure in the tank is regulated with an automatic on/off limit switch to a maximum of 40 P.S.I. Unit maintains 30 P.S.I. for extended periods. The unit has a five foot grounded 3 wire cord.

The compressor features a 1/8 HP motor which operates on 115 Volts, 1 Phase, 60Hz and draws .9 AMPS.

Shipping Weight: 14 lbs. (6.33kg)



DA400R AIR COMPRESSOR (1/6 H.P.)

1/6 H.P. Piston Compressor with Auto shutoff. Compressor shuts off when airbrush is not in use. Operating pressure 30 - 50 PSI depending on airbrush being used, delivers up to 55 psi. 110-120VAC, 1 Ph, 60 Hz, 42L/Min. (1.48CFM), 1720 rpm. With R-75 Regulator & Moisture Trap included.

Shipping Weight: 12.2 lbs. (5.6 kgs)